

MAX

®

BUILDING OUR WORLD

SuperFramer SN883RH3

21 degree Full Round Head Framing nailer



FEATURES




● Unique tangle free swivel joint

No more fighting with heavy hoses no matter what angle the nailer is held.



● Maintenance free end cap filter (US Patent 5637125)

Maintenance free end cap filter prevents foreign substances from entering the tool. Internal parts last longer and the inside of the tool is kept clean. The filter has a self-cleaning feature; Foreign substances are ejected automatically from the tool when the air hose is disconnected.

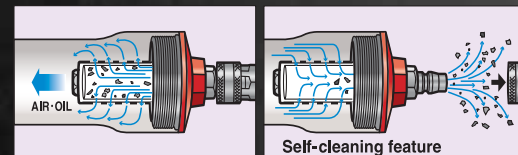

● Heavy duty rafter hook



● New ANSI Compliant Trigger System

The tool comes from the factory with a sequential trigger installed, and also includes a contact fire trigger in the carton box. No special tool is required to switch the trigger.



● Dial adjustable depth control

Dial depth control requires no special tools.



Depth guide

● Nose magnet

Holds the last nail of the strip, preventing waste and jamming.



● Compact design

30% shorter than conventional tools at 11-7/8" in height. Allows the user to fit the tool into tighter spaces.

● Pointy teeth on contact arm

Pointy teeth on contact arm allows the user to get a firm grip when toe-nailing.



Tangle free swivel fitting



Rafter hook



Nose magnet



Self cleaning filter



Trigger lock lever



Depth control

APPLICATIONS

- Framing
- Sheathing
- Subfloors
- Decking
- Siding
- Crating

TOOL SPECIFICATIONS

MODEL	SN883RH3
WEIGHT	7.0lbs
DIMENSIONS	11-7/8"(H) x 4-3/4"(W) x 20-3/4"(L)
LOAD CAPACITY	64 nails
OPERATING PRESSURE	70 - 100 p.s.i. (Regulator)
AIR CONSUMPTION	0.077 ft ³ /cycle (90psi operating pressure)

FASTENERS APPLICABLE



21 degree full round head stick nails


Head diameter
.267" ~ .295"



Plastic collated



Paper collated



Shank diameter
.113" ~ .148"

Nail length
2" (6d)
3 - 1/4" (12d)

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

MAX USA CORP.
 257 East 2nd Street Mineola, NY 11501
 TEL: 800-223-4293 FAX: 516-741-3272
 www.maxusacorp.com



Dealer