


## Multi-Purpose PE Tape

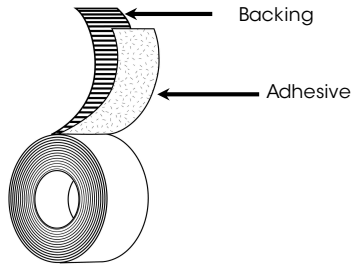

<b>Backing:</b>	Polyethylene Film
<b>Adhesive:</b>	Synthetic Rubber
<b>Liner:</b>	N/A
<b>Colors:</b>	Red, White, Black, Silver, Teal, Blue, Orange, Clear, Pink*, Green*
<b>Specifications:</b>	N/A
<b>Standard Sizes:</b>	48mm x 55m, 72mm x 55m

### Applications

- Abatement industry: hang and patch poly sheeting, seal waste disposal bags, etc.
- Labeling and color coding
- Short-term masking for stucco and plaster
- Bundling, wrapping, and repairs
- Wire hold down (AV Cord Tape)
- Convention industry - bundling carpet, securing poly carpet protection, color coding, etc.
- Polyethylene splicing
- Surface protection
- Dissimilar metal tape

### Features

- Polyethylene Film Backing
- Synthetic Rubber Adhesive
- Low VOC, Contains no heavy metals (such as lead and chromium)

### Benefits

- Conformable and flexible
- Excellent durability and solvent resistance
- Low elongation for consistent surface bond
- Pinked/Serrated Edge available for hand tearability
- High tack for good quick stick
- Excellent shear strength
- Repositionable and clean removal from many surfaces
- Environmentally friendly & safe to use.

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness (Colors)</b>	7.0 mils	0.178 mm	ASTM D-1000
<b>Adhesion to Steel</b>	75 oz/in	8.21 N/cm	PSTC-101
<b>Adhesion to Backing</b>	35 oz/in	3.83 N/cm	PSTC-101
<b>Tensile Strength</b>	25 lb/in	43.78 N/cm	ASTM D-1000
<b>Application Temperature</b>	30 to 160 °F	-1 to 71 °C	
<b>Operating Temperature</b>	20 to 200 °F	-7 to 93 °C	
<b>Elongation</b>	85%		

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

\* Subject to availability and minimum order

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.